



WE WEIGH THE WORLD

www.globalcas.com

## Basic Scale


# PR-IID/DU



► PR-IID(LED)

## Basic Scale

As a simple weighing scale with max. 1/30,000 resolution, PR-IID/DU is suitable for various industrial environment, including market & shop with a low-profile design.

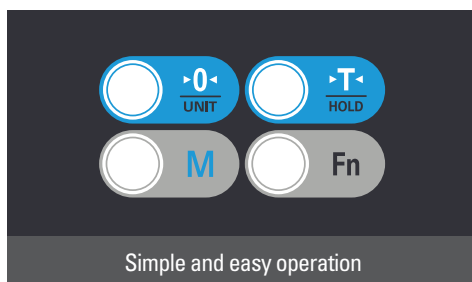

# CAS

### FEATURES

**High Resolution for Weighing (Dual 1/3,000~Single 1/30,000)**

**Simple & Easy operation**

- Key: 4ea
- Various Weighing Mode:  
General Weighing, Weight Comparison  
Mode, Counting Mode



**Low Profile Design**

Excellent applicability in open market with a low body

**Easy to Install**

- 9-pin RS-232C and USB Type B communication(Optional)
- Powered by various sources
  - Rechargeable battery or AC adapter
  - Optional: 1.5V D size Dry battery x 3ea, USB Type B(5V) (not for charging)



**High-visibility display**

LED/LCD display offers high visibility in any lightening condition.

### OPTIONS


- Dry battery
- RS-232C
- USB Type B (for communication and Power, not for battery charging)
- \* Selectable between RS-232C or USB port



### SPECIFICATIONS

Model	PR-IID/DU					
Capacity	Dual Interval	Single	Dual Interval	Single	Dual Interval	Single
Readability(e)	Max 3/6 kg	Max 6 kg	Max 6/15 kg	Max 15 kg	Max 15/30 kg	Max 30 kg
External	e=1/2g	e=2g e=1g e=0.5g e=0.2g	e=2/5g	e=5g e=2g e=1g e=0.5g	e=5/10g	e=10g e=5g e=2g e=1g
Resolution	1/3000	1/3000 ~ 1/30000	1/3000	1/3000 ~ 1/30000	1/3000	1/3000 ~ 1/30000
Display	D type(LED): 7 Segment LED (6 Digit) x 1ea D type(LCD): 45 " x 15.5 " LCD (6 Digit) x 1ea DU type(LED): 7 Segment LED (6 Digit) x 2ea					
Symbols	Stable, Zero, Tare, g, kg, Low Battery, HI / OK / LO & PCS, LK, Power					
Keys	ZERO/ UNIT, TARE/ HOLD , MODE, FUNCTION					
Functions	General Weighing, Counting Function : Counting Sample Range 10, 20, 50, 100, 200, 500 / Weight Comparison Function : hi, ok, low, Backlight ON/OFF Control Function, Hold, Unit Conversion					
Product Size (W) x (D) x (H)	D TYPE : 341x 382 x 102 mm / DU TYPE : 341x 434x 473 mm					
Platter Size	330 (W) x 235 (D)[mm]					
Product Weight	D type : 3.3 kg / DU type : 3.6kg					
Power	Pb 4 V/4 A Rechargeable battery, 6 VDC Adaptor, USB Type B(Optional, not for battery charging), 1.5V D size dry battery x 3ea(Optional)					
Battery Life	LED : Approx. 170 hours (Manganese Battery) / 340 hours (Alkaline) / 80 hours (Pb Battery) LCD : Approx. 300 hours (Manganese Battery) / 600 hours (Alkaline) / 200 hours (Pb Battery)					
Operating Temperature	-10°C ~ +40°C					
Options	1.5V D size dry battery x 3ea, RS-232C, USB Type B					

### DIMENSION

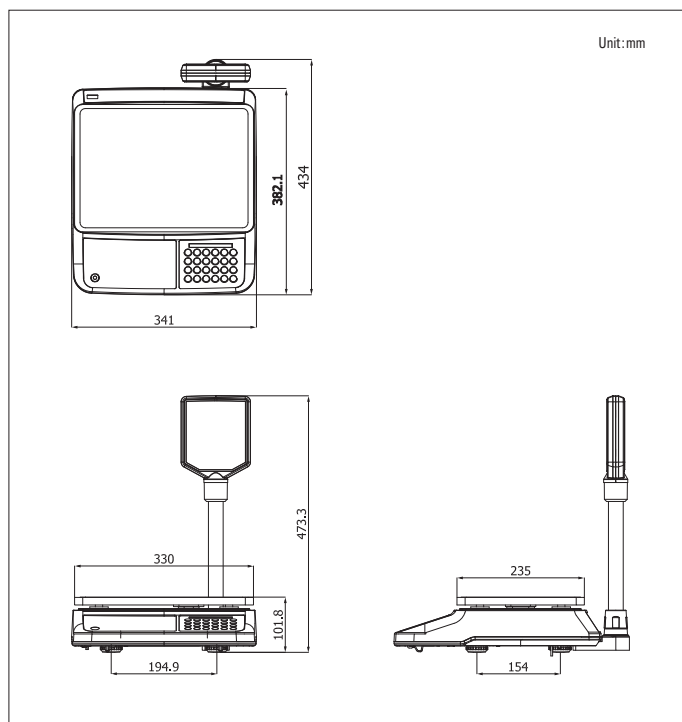

CAS Global homepage

CAS BLDG., 1315, YANGJAE-DAERO  
GANGDONG-GU, SEOUL, KOREA  
TEL\_82 2 2225 3500 / FAX\_82 2 475 4668  
[www.globalcas.com](http://www.globalcas.com)



Specifications are subject to change without notice improvement.

